


KIT-TZ60-ZKE (CS-TZ60ZKEW + CU-TZ60ZKE)



Application Comfort Cloud Panasonic. Commande centralisée intuitive

[EN SAVOIR PLUS](#)

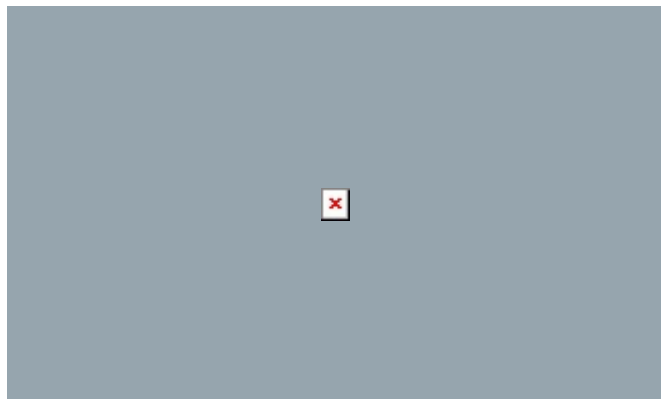

Contrôle Vocal

Repoussez les limites de votre confort grâce au contrôle vocal des principales fonctionnalités de votre système de climatisation

[EN SAVOIR PLUS](#)

TZ ultra-compacte avec nanoe™ X R32		
		6.00 kW
Kit		KIT-TZ60-ZKE
Cooling capacity (Nominal)	kW	6,00
Cooling capacity (Min)	kW	0,98
Cooling capacity (Max)	kW	6,60
EER (Nominal) (1)	W/W	3,24
EER (Min) (1)	W/W	3,92
EER (Max) (1)	W/W	2,87
SEER (2)		6,80 A++
Pdesign (cooling)	kW	6,0
Input power cooling (Nominal)	kW	1,85
Input power cooling (Min)	kW	0,25
Input power cooling (Max)	kW	2,30
Annual energy consumption cooling (3)	kWh/a	309
Heating capacity (Nominal)	kW	7,00
Heating capacity (Min)	kW	0,98
Heating capacity (Max)	kW	8,20
Heating capacity at -7°C	kW	4,90
COP (Nominal) (1)	W/W	3,72
COP (Min) (1)	W/W	4,67
COP (Max) (1)	W/W	3,57
SCOP (2)		4,30 A+
Pdesign at -10°C	kW	4,4
Input power heating (Nominal)	kW	1,88
Input power heating (Min)	kW	0,21
Input power heating (Max)	kW	2,30
Annual energy consumption heating (3)	kWh/a	1.433
Indoor unit		CS-TZ60ZKEW
Indoor power source	V	230
Indoor recommended fuse	A	20
Indoor connection indoor / outdoor	mm²	4 x 2,5
Indoor air flow (Cool)	m³/min	18,4
Indoor air flow (Heat)	m³/min	19,4
Moisture removal volume	L/h	3,3
Indoor sound pressure (Cool -Hi) (4)	dB(A)	45
Indoor sound pressure (Cool -Lo) (4)	dB(A)	37
Indoor sound pressure (Cool -Q-Lo) (4)	dB(A)	34
Indoor sound pressure (Heat -Hi) (4)	dB(A)	45
Indoor sound pressure (Heat -Lo) (4)	dB(A)	37
Indoor sound pressure (Heat -Q-Lo) (4)	dB(A)	34
Indoor dimension (Height)	mm	295
Indoor dimension (Width)	mm	1.040
Indoor dimension (Depth)	mm	244
Indoor net weight	kg	12
nanoe X Generator		Mark 1
Outdoor unit		CU-TZ60ZKE
Outdoor air flow (Cool)	m³/min	34,4
Outdoor air flow (Heat)	m³/min	35,6
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	49
Outdoor sound pressure (Heat -Hi) (4)	dB(A)	51
Outdoor dimension (Height) (5)	mm	619
Outdoor dimension (Width) (5)	mm	824
Outdoor dimension (Depth) (5)	mm	299

TZ ultra-compacte avec nanoe™ X R32		
		6.00 kW
Outdoor net weight	kg	35
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35)
Pipe diameter (Gas)	Inch (mm)	1/2 (12,70)
Pipe length range	m	3 ~ 30
Elevation difference (in/out) (6)	m	15
Pipe length for additional gas	m	10
Additional gas amount	g/m	15
Refrigerant (R32) / CO2 Eq.	kg / T	1,22 / 0,82
Operating range (Cool - Min)	°C	-10
Operating range (Cool - Max)	°C	+43
Operating range (Heat - Min)	°C	-15
Operating range (Heat - Max)	°C	+24

Produits complémentaires



CZ-CAPRA1 RAC interface
adapter for integration
into P Link